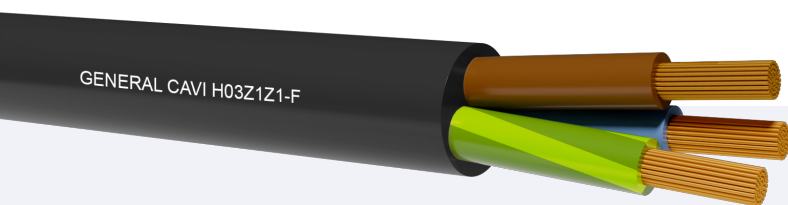


**H03Z1Z1-F**

Cavi L.S.O.H.

Model Product: 283-284 - 20160412

**general**  
**CAVI** s.p.a.

Class 5 flexible copper conductor.  
Thermoplastic mixture Insulation in TI6 quality.  
Thermoplastic sheath in TM7 quality.

**STANDARDS**

CEI EN 50525-3-11 CEI 20-20/14 (CENELEC HD 21.14 S1)  
CEI EN 60332-1-2(CEI 20-35) CEI EN 50267 CEI EN 60684

Accordingly to the standards BT 2014/35/UE- 2011/65/EU (RoHS 3)

**COMMON FEATURES**

For inside domestic rooms, kitchen and office use. Suitable for domestic device, also in wet site, AD2. Where cords having a low level of emission of smoke and corrosive gases are required in case of fire or burning. Not suitable for outside permanent use, for industrial and agricultural buildings, and not suitable for industrial tools too. Not recommended for the cabling of fixed installations. Not suitable for kitchen and heating device. Particularly suitable for frequent bending and twisting.

**EMPLOYMENT**

Minimum bending radius per D cable diameter (in mm):  
Fixed installation D <8 D = 3D <3D 12 = D <20 = 4D D > 20 = 4D  
Free Movement D <8 D = 4D <12 = 4D D <D 5D = 20 > 20 = 6D  
At the entrance to a portable device or a mobile device  
mechanical stress with D <8 = 6D D <12 = 6D D <20 = 6D D > 20 = 8D  
Festoons eg. gantry crane for D <8 = 6D D <12 = 6D D <20 = 6D D > 20 = 8D  
Winding repeated D <8 = 6D D <12 = 6D D <20 = 6D D > 20 = 8D  
Diverted to pulley D <8 = 8D D <12 = 8D D <20 = 8D D > 20 = 8D  
Maximum pulling stress: 15 N/mm<sup>2</sup> section of copper dynamic applications,  
for fixed 50 N/mm<sup>2</sup>

**PACKING**

100mt. rings in thermoplastic film or drums to agree.

FLEXIBLE CABLES (CORDS) INSULATED AND SHEATHED  
WITH HALOGEN-FREE L.S.O.H. THERMOPLASTIC  
COMPOUNDS

Nominal voltage U<sub>0</sub>: 300 V

Nominal voltage U: 300 V

Test voltage: 2000 V

Maximum operating temperature: +60°C

Maximum short circuit temperature: +150°C

Minimum installation and laying temperature: +5°C

Min. operating temperature (without mechanical shocks): -10°C

**CORE COLOURS**

Two cores: blue-brown

Three cores: brown-black-gray (or blue-brown-Y/G)

Four cores: blue-brown-black-gray (or Y/G instead blue)

**SHEATH COLOUR**

Black

**INK MARKING**

GENERAL CAVI - IEMMEQU <HAR> - H03Z1Z1-F - year



# H03Z1Z1-F

Cavi L.S.O.H.

Model Product: 283-284 - 20160412



Conductor Number (N°)	Cross section (mm²)	Approx conductor diameter (mm)	Insulation thickness (mm)	External diameter		Approx cable weight (kg/km)	Electric resistance at 20°C (Ohm/km)	Current carrying capacities 30°C (A)
				Minimum (mm)	maximum (mm)			
Two cores								
2x	0.5	0.9	0.5	4.6	5.9	34	39	3
2x	0.75	1	0.5	4.9	6.3	42	26	6
Three cores								
3G	0.5	0.9	0.5	4.9	6.3	41	39	3
3G	0.75	1	0.5	5.2	6.7	51	26	6
Four cores								
4G	0.5	0.9	0.5	5.4	6.9	49	39	3
4G	0.75	1	0.5	5.7	7.3	62	26	6

Minimum order quantity