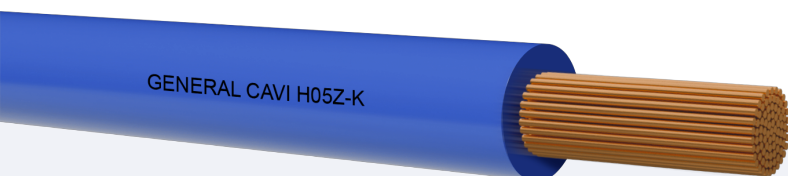


H05Z-K

CPR Eca

Model Product: 246 - 20210324

general
CAVI s.p.a.

Class 5 flexible copper conductor.
RUBBER insulation EI5 quality.

STANDARDS

CEI EN 50525-3-41 CEI 20-19/9 (CENELEC HD 22.9 S3) BS
EN 50525-3-41 NF C 32-102-9 VDE 0282-9 (IEC
60227-3)EN 50575:2014 + EN 50575/A1:2016

Accordingly to the standards BT 2014/35/UE- 2011/65/EU (RoHS 3)

COMMON FEATURES

Supply of electricity and communications in buildings and other civil engineering works with the objective of limiting the generation and spread of fire and smoke. This cable is particularly suited in high fire risk places containing a great number of people (like office, data processing centres, schools, hotels, supermarkets, undergrounds, hospitals, cinemas, theatres, discos). Suitable for fixed lay in pipe, cable-carrier channels, inner wiring of electric switchboards inside interruption and control equipments.

EMPLOYMENT

Minimum bending radius per D cable diameter (in mm):
Fixed lay=3D
Curving taken care of in proximity of finishes them=4D
Maximum pulling stress: 50 N/mm²

PACKING

100mt. rings in thermoplastic film. Drums to agree.

FLEXIBLE SINGLE CORE WITHOUT SHEATH CABLES FOR
FIXED WIRING WITH LOW SMOKE AND CORROSIVE GAS
EMISSION L.S.O.H.

Nominal voltage U0: 300 V

Nominal voltage U: 500 V

Test voltage: 2000 V

Maximum operating temperature: +90°C

Maximum short circuit temperature: +250°C

Minimum installation and laying temperature: -5°C

Min. operating temperature (without mechanical shocks): -20°C

Minimum installation and laying temperature: -5°C

CORE COLOURS

Single core: It's allowed the suitable single colours: Black, light blue, brown, grey, orange, pink, red, turquoise, violet, white, green and yellow. It's allowed all bicolour combinations of that colours.

MARKING ENGRAVING

GENERAL CAVI -Eca- H05Z-K IMMEQU <HAR> - year

NOTE

Maximum storage temperature: +40°C
CEI 20-40 "Guide to use of low-voltage cables
The colors distribution of Y / G has to follow what is indicated in CEI EN 50525-1 5.4.4, the use of yellow or green in some countries may be prohibited or restricted by regulations or other national security. In some countries the use of green is allowed especially for decorative chains.

H05Z-K

CPR Eca

Model Product: 246 - 20210324



Conductor Number (N°)	Cross section (mm ²)	Maximum conductor diameter (mm)	Insulation thickness (mm)	External diameter		Electric resistance at 20°C (Ohm/km)	Approx cable weight (kg/km)	Current carrying capacities in air 30°C (A)
				Minimum (mm)	maximum (mm)			
Single core								
1x	0.5	0.77	0.6	2.1	2.6	39.0	9.0	3
1x	0.75	0.95	0.6	2.2	2.8	26.0	12.0	6
1x	1	1.30	0.6	2.4	2.9	19.5	14.0	10