


# H07V-U

CPR Eca

Model Product: 201 - 20230213

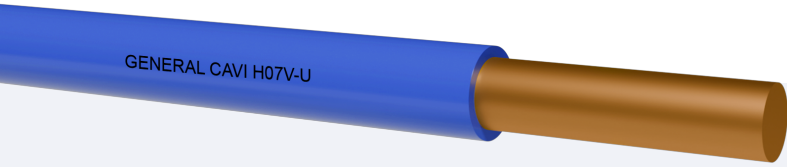

Rigid class 1 red copper conductor.  
PVC insulation in T11 quality

## STANDARDS

CEI EN 50525-2-31 CEI 20-20/3(CENELEC HD 21.3 S3), BS EN 50525-2-31 ,NF C 32-201-3 ,DIN VDE 0285-525-2-31 EN 50575:2014 + EN 50575/A1:2016(IEC 60332-1-2)(IEC 60227-3)

Accordingly to the standards BT 2014/35/UE- 2011/65/EU (RoHS 3)

## COMMON FEATURES

It must be laid inside pipes at sight, embedded or closed systems. Allowed for fixed and protected installation, upon or into illumination sets for voltage up to 1000V AC or 750V DC to ground. Supply of electricity and communications in buildings and other civil engineering works with the objective of limiting the generation and spread of fire and smoke.

## EMPLOYMENT

Minimum bending radius per D cable diameter (in mm):  
Fixed lay:  $D < 8 \leq 4D$   $D < 12 \leq 5D$   $D > 12 \leq 6D$   
Curve near terminal:  $D < 8 \leq 2D$   $D < 12 \leq 3D$   $D > 12 \leq 4D$   
Maximum pulling stress: 50 N/mm<sup>2</sup>

## PACKING

100mt. rings in thermoplastic film or cardboard packagings

RIGID SINGLE CORE CABLES WITHOUT SHEATH FOR GENERAL PURPOSE

Nominal voltage U0: 450 V

Nominal voltage U: 750 V

Test voltage: 2500 V

Maximum operating temperature: +70°C

Maximum short circuit temperature: +160°C

Minimum installation and laying temperature: +5°C

Min. operating temperature (without mechanical shocks): -10°C

Minimum installation and laying temperature: +5°C

## CORE COLOURS

Single core: Black, light blue, brown, grey, orange, pink, red, turquoise, violet, white, Y/G.

## MARKING ENGRAVING

GENERAL CAVI - IEMMEQU <HAR> - Eca - year

## NOTE

Maximum storage temperature: +40°C.

Cores number	Cross section	Approx conductor diameter	Insulation medium thickness	Approx external production diameter	Approx cable weight	Electric resistance at 20°C	Current carrying capacities in air 30°C
(N°)	(mm <sup>2</sup> )	(mm)	(mm)	(mm)	(kg/km)	(Ohm/km)	(A)
Single core							
1x	1.5	1.4	0.7	3.1	21	12.1	16
1x	2.5	1.8	0.8	3.75	32	7.41	20
1x	4	2.3	0.8	4.4	48	4.61	25
1x	6	2.8	0.8	4.9	66	3.08	36
1x	10	3.5	1	6.4	112	1.83	50

Current carrying capacities are calculated on a single circuit with 3 loaded conductors. Lay type: CEI 64-8 Tab 52.C (3-5-31-32-33-33-18)